

TECHNICAL REPORT



Part of the Exova Group

Maxwell Road, Stevenage
Hertfordshire
SG1 2EW, UK

T: +44(0) 1438 777 700
F: +44(0) 1438 777 800
E: info@fira.co.uk
W: www.fira.co.uk

Trimproof Ltd. t/a Chieftain Fabrics

Wellington Place

Trim

C15 W248

Ireland

Our Ref: **TFTXF59857C**

Date: 11 December 2015

Delivery Date: 10 April 2015

Test Dates: 15 July – 24 September 2015

For the attention of Ms Malgorzata Kawka

SAMPLE(S) FOR TEST:

One, Pink artificial leather – Ref: JUST COLOUR

Note: The above descriptions are as supplied by the client and have not been verified by FIRA who can take no responsibility for the accuracy of the description.

TEST REQUIREMENTS:

Accelerated-ageing test – ISO 1419:1995*

*Test subcontracted to another testing laboratory

RESULT:

5 weeks

This Report relates to the sample(s) submitted for test and no others. Additions, deletions or alterations are not permitted.

Test reports are given to the client in confidence, and may only be reproduced in whole or in part with written permission from FIRA International Limited. Note that the words "tested by FIRA" may be used in subsequent publicity for the product; "approved" must **not** be used.

Tests are carried out on the understanding that neither FIRA International Limited nor its officers can accept any legal responsibility for information or advice given or opinions expressed whether in response to specific enquiries or otherwise.

This Report is given subject to the Terms of Business of FIRA International Limited which are available at www.fira.co.uk/document/fira-terms-and-conditions.pdf

TECHNICAL REPORT

DESCRIPTION

Item: One, Pink artificial leather – Ref: JUST COLOUR

Initial Inspection: Condition as new

TEST RESULTS

ISO 1419:1995 - RUBBER- OR PLASTICS-COATED FABRICS - ACCELERATED-AGEING TESTS

INTRODUCTION

A sample of pink PVC coated material was tested to ISO 1419 Method C. This standard assesses the resistance of fabrics to deterioration by accelerated ageing. Method C is used when fabrics are likely to be exposed to very high humidity in combination with relatively high temperature service conditions. This test is not appropriate where materials will be continuously immersed in water during use.

EXPERIMENTAL

Test pieces were cut from the sample material.


Test pieces were suspended in a humidity cabinet so that they were exposed to free passage of air on both sides. The cabinet was set to $70\pm 1^{\circ}\text{C}$ and $>95\%RH$.

The test was continued for 5 weeks. A single piece of the sample was removed weekly: 5 pieces were allowed to age for the full 5 weeks.


On removal from the cabinet, each sample was laid flat on a paper towel (@ca.23°C/50%RH)

TECHNICAL REPORT

CONCLUSION

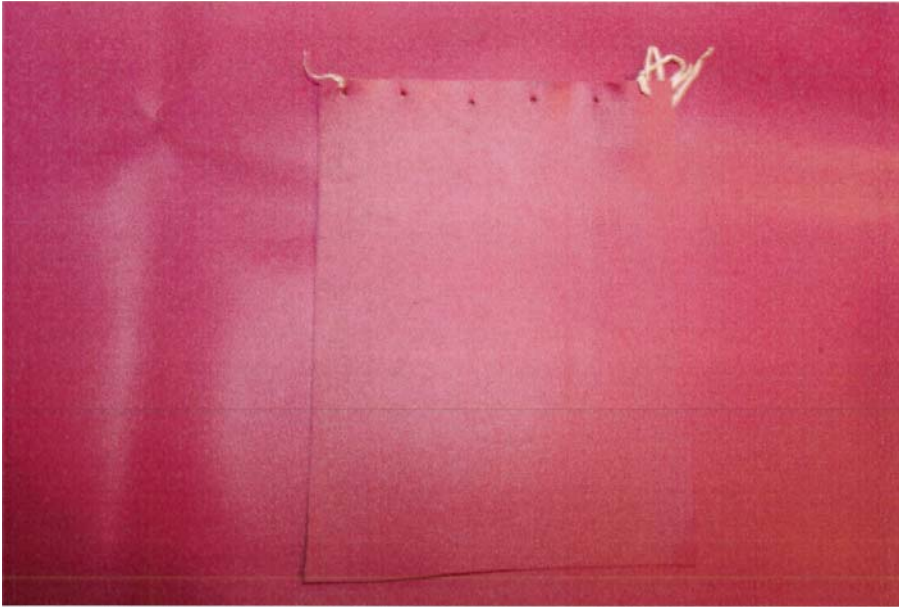

Comparison of pink material before and after test

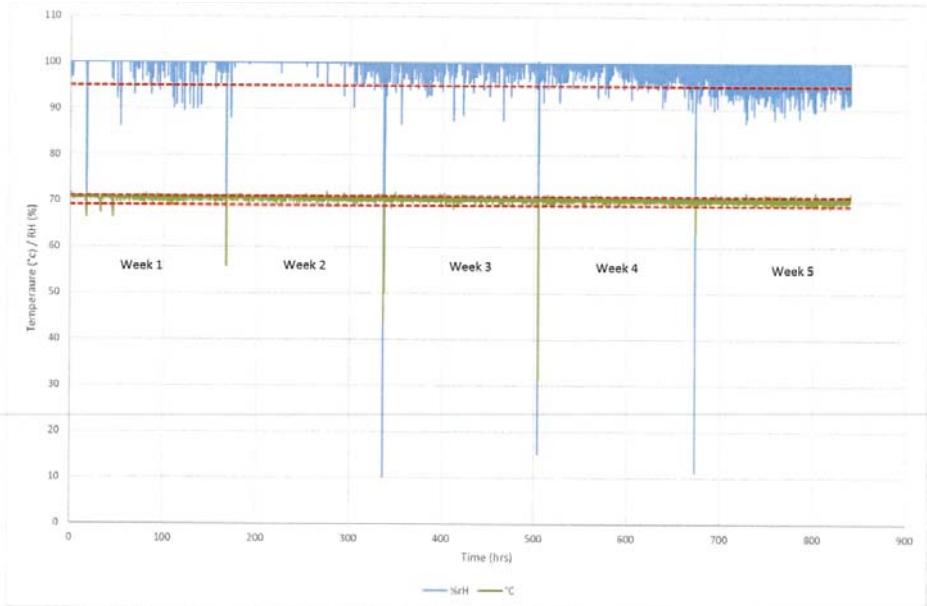

Data log showing humidity and temperature throughout test

Reported by: Matthew Carey
Approved by: Stephen Cotton
Technical Specialist

***** End of Report *****