

Our Ref: SW/RM

11 November 2020


Report 366936

Page 1 of 3

Chieftain Fabrics
Fair Green
Trim
Co. Meath
Ireland

Contact: Sinead Doyle

DATE RECEIVED : 6 OCT 2020
 QUALITY/REFERENCE : JUST COLOUR
 REPUTED FIBRE CONTENT : 100% PVC
 FABRIC DESCRIPTION : WOVEN
 COLOUR/DESIGN : COBALT
 END USE : UPHOLSTERY
 ORDER NUMBER : SINEAD
 PERFORMANCE STANDARD : GENERAL

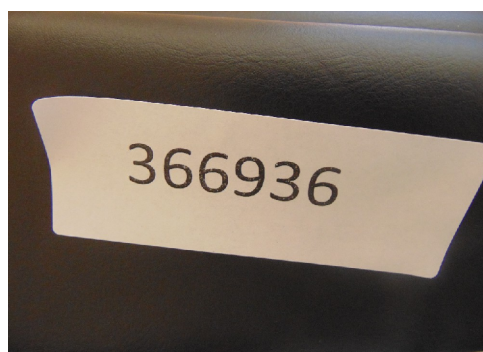

REPORT SUMMARY

| Tests | Method | Pass | Fail | Requirement |
|--------------------|-------------------------------------|------|------|--------------|
| Accelerated Ageing | Accelerated Ageing ISO 1419:1995 | Pass | | Satisfactory |



S. WISEMAN
LABORATORY DIRECTOR



118 Lupton Avenue Leeds LS9 6ED
 Tel:0044 (0) 113 248 8830 Fax:0044 (0) 113 248 0239 EMail: info@hstts.co.uk
 Registered No. 2899980 VAT No. 613 4310 86

11 November 2020

Report 366936

Page 2 of 3

This report may not be reproduced except in full without the written approval of HSTTS. In all circumstances results of tests are implied as referring only to the sample supplied and should not be construed or interpreted on any other basis. The comments given in the report are for guidance only and are not a part of the results. Where specified in a test method, preconditioning in accordance with ISO 139 is not carried out as samples are exposed to the conditioning atmosphere specified within ISO 139 for a minimum of 16 hours prior to test.



118 Lupton Avenue Leeds LS9 6ED
Tel:0044 (0) 113 248 8830 Fax:0044 (0) 113 248 0239 EMail: info@hstts.co.uk
Registered No. 2899980 VAT No. 613 4310 86

OTHER TESTS

Accelerated Ageing ISO 1419:1995

Accelerated Ageing ISO 1419:1995
70°C, 95% Humidity (5 Weeks)

Procedure

A sample of the PVC coated fabric was placed in an environmental chamber at 70°C, 95% Humidity for 5 weeks.

The fabric was assessed for stability and general appearance after 5 weeks.

| | | |
|-----------|--------|--------|
| Shrinkage | Length | - 1.3% |
| | Width | - 0.5% |

Appearance Assessment

There was no significant change in appearance of the PVC coated fabric after testing. No breakdown of the PVC coating or delamination of the fabric was observed. There was no significant change in colour, the shade change being equivalent to grade 4-5 when assessed against the criteria specified in BS EN ISO 105:A02.

Requirement: Satisfactory
